



## Advantage® Clear+ for Rooflights

A high solids, two pack clear coating with excellent UV, mechanical and temperature resistance for renovating aged GRP rooflights. Outperforms other coatings giving 15 years of protection.

### Benefits

- ✓ Improve clarity
- ✓ High solids content at 95%
- ✓ Applied in a single coat
- ✓ Non yellowing
- ✓ Good working pot life
- ✓ High weather and UV resistance for this one coat system
- ✓ Non Isocyanate
- ✓ Good flexibility
- ✓ Long life expectancy, 25-30 years
- ✓ Long term reliability due to excellent adhesion and UV resistance
- ✓ Handles normal thermal movement with a high elasticity
- ✓ Minimum weight gain after application
- ✓ 15 year industry leading warranty available



✓ **Long Product Warranty -**  
30 years for metal roofs,  
20 years for asbestos cement  
roofs, 15 years for gutters  
and cut edge corrosion

✓ **Free training and CPDs**  
available on request

## Preparation and Cleaning

- All surfaces must be clean, dry and free from dirt, grit, grease, fungus and mould. Water under the overlaps should be dried before application.

## Application


- Stir the base component thoroughly then add the activator to the base in the ratio mentioned below.
- Mix the activator and base until they become homogenous.
- It is recommended that the product is maintained at 10°C and above prior to and during application.
- Mixing ratio by volume: 4 parts base to 1 part activator.

## Important

⚠ Surface wear can affect coverage, particularly if the gel coat is worn down to the fibres which would require a higher application rate.

## Application Notes

- When estimating please make sure that roof profiles are considered and added to the surface area accordingly.
- The substrate must be free from ice, frost and any contamination. Do not apply during freezing conditions, or if these conditions are likely to occur before curing.

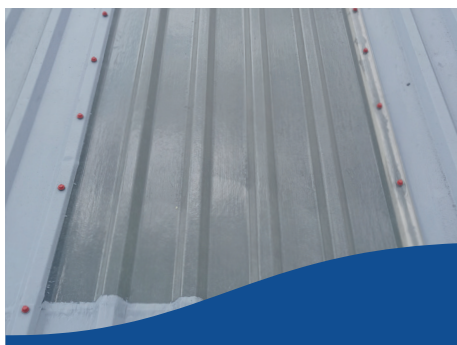

## Technical Data

Form:	Transparent sheen
Coverage:	Theoretical 8m <sup>2</sup> per 1L (depending on substrate)
Pack Size:	5 Litres (in 2 part pack)
Shelf Life:	12 months
Temp. Limits:	3°C - 40°C
Touch Dry:	4 Hours
Fully Dry:	12 Hours
Recoat Time:	Min. 6 Hours

## Components

- Advantage<sup>®</sup> Plus Clear: 5L in a two part mix

*No responsibility can be taken by the manufacturers where conditions of use are beyond our control. All products should be used in accordance with the manufacturer's instructions. For further information please refer to the application guide and Material Safety Data Sheet. This information and guidance is given in good faith and without prejudice and liability, Technical and Safety Data must be observed. All coverages are given as a guide only, as volumes will vary with profile, porosity and method of application. Loss factors should also be taken into account.*

# ALLTIMES COATINGS

Alltimes Coatings, Units C & D,  
Station Road Industrial Estate,  
South Woodchester, Stroud,  
Gloucestershire. GL5 5EQ. UK

T: 01453 872 850

E: [info@alltimescoatings.co.uk](mailto:info@alltimescoatings.co.uk)

W: [www.alltimescoatings.co.uk](http://www.alltimescoatings.co.uk)